



NEW ULTIMA SERIES

Ceramic Seal-On Extensions Extend Spark Plug Life In Demanding Applications


Engine laboratory tests have shown that when a tight fitting spark plug boot is used, spark plug life is increased. Now BG introduces a composite ceramic - teflon extension that incorporates a teflon coated Viton™ "O" Ring for increased sealing pressure. Because the voltage necessary to "flash-over" the plug insulator is increased, spark plugs will operate at larger gaps that previously resulted in plug failure. . .

- High alumina ceramic prevents dielectric breakdown due to corona cutting.
- Viton™ "O" Ring increases sealing pressure, yet makes extension easier to install.
- Patented DS™ Connector uses a double spring and will not loosen like rajah types.
- Model available for use with silicone hose (stud connection).

| APPLICATION | MODEL | SPECIFY LENGTH | SPECIFY SPARK PLUG TYPE See Chart Below | SPECIFY SUPPORT OPTION See Chart Below |
|---------------------------------|------------------|------------------------------|--|---|
| For 7mm wire only | Order P/N 23155- | 06" <input type="checkbox"/> | A <input type="checkbox"/> | 0 <input type="checkbox"/> |
| For 7mm wire with silicone hose | Order P/N 23160- | 06" <input type="checkbox"/> | A <input type="checkbox"/> | 0 <input type="checkbox"/> |

| SPECIFY SPARK PLUG TYPE | |
|-------------------------|---|
| A | RM77N, W77N, RW82P, RM79F, D78Y, RW80N, RW83F, RW77N, RW78N, RB77WPC, Altronic, RS79N |
| B | RN79G, J6C, RL85G, RL15B, F100, N5C, 42XL, L82C |
| C | W80N, W85N, D9, D15Y, D14N, RD16 |
| D | W14, W18, W10 |
| E | RB212-1, RB485-1 |
| F | RC501P, RC78PYP |

| SPECIFY SUPPORT OPTION | |
|------------------------|------------------------------|
| 0 | NONE |
| 1 | Include support (Ø = 1.591") |

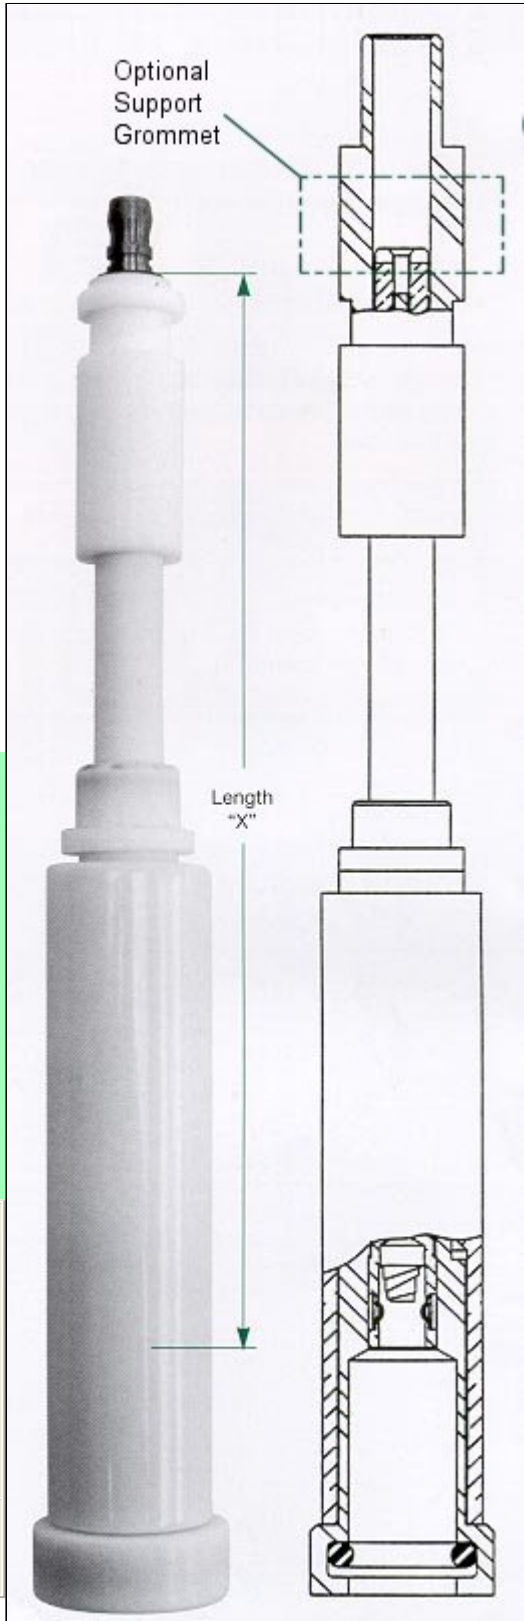

Resistorized 8000-12000 ohms
for 7mm wire with silicone hose

Order P/N 23550 -

Part No.
23155-

Part No.
23160-

[Previous Page](#)

[HOME](#) | [CONTACT BG](#) | [REFERENCE GUIDE](#)

16

[Next Page](#)